


SA6 Ram Barrier Data Sheet



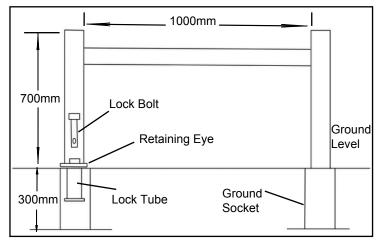

Features:

- Constructed from 70 x 70 hollow section steel 5mm thick.
- 300mm engagement of both legs into the ground.
- Locked in place with Bulldog Super Lock Bolt with over one million possible key combinations.
- Lock tube to receive Super Lock Bolt.
- 10mm thick retaining eye welded to barrier leg.
- Bright yellow, highly visible powder coated finish.
- 2 protection plates supplied to cover ground socket openings when ram barrier is removed for access.
- Dust cover to protect lock.
- No protrusions when ram barrier is removed.
- Weight = 30.9kg